PA 953194

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

January 29, 2003

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM
THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK
OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT
APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A
FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: *60/432,971*
FILING DATE: *December 12, 2002*

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS

M. SIAS
Certifying Officer

12/131 02   60432971.121

PROVISIONAL APPLICATION COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION under 37 CFR 1.53(b)(2).

| Docket Number US020542 | | Type a plus sign (+) inside this box | |

INVENTOR(s) / APPLICANT(s)

LAST NAME	FIRST NAME	MIDDLE INITIAL	RESIDENCE (CITY AND EITHER STATE OR FOREIGN COUNTRY)
Burns Vaidyanathan	Geoffrey Krishna	F.	RIDGEFIELD, CT BRIARCLIFF MANOR, NY

TITLE OF THE INVENTION (280 characters max)

DATAFLOW-SYNCHRONIZED EMBEDDED FIELD PROGRAMMABLE PROCESSOR ARRAY

CORRESPONDENCE ADDRESS

Corporate Patent Counsel
U.S. Philips Corporation
580 White Plains Road
Tarrytown, NY 10591

STATE	New York	ZIP CODE	10591	COUNTRY	U.S.A.

ENCLOSED APPLICATION PARTS (check all that apply)

X	Specification	Number of Pages	2		Small Entity Statement
X	Drawing(s)	Number of Sheets	8		Other (specify)

METHOD OF PAYMENT (check one)

	A check or money order is enclosed to cover the Provisional filing fees	PROVISIONAL FILING FEE AMOUNT ($)	$160.00
X	The Commissioner is hereby authorized to charge filing fees and credit Deposit Account Number: __14-1270__		

S:\WX\Applications\US020542-prov_app.doc

1

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

[X] No

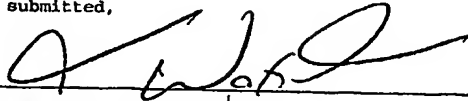[ ] Yes, the name of the U.S. Government agency and the Government contract number are:

Respectfully submitted,

SIGNATURE _____ Date: 12/12/02

TYPED or PRINTED NAME AARON WAXLER

REGISTRATON NO. · 48,027

[ ] Additional inventors are being named on separately numbered sheets attached hereto

---

CERTIFICATE OF EXPRESS MAILING

Express Mail Mailing Label No. EL 827840779US
Date of Deposit 12/12/2002

I hereby certify that this paper and/or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

Burnett James
Typed Name

Signature

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

GEOFFREY F. BURNS, ET.AL

Serial No:

Filed: CONCURRENTLY

Title: DATAFLOW-SYNCHRONIZED EMBEDDED FIELD PROGRAMMABLE PROCESSOR ARRAY

Atty. Docket

US020542

Group Art Unit No.

Examiner:

Honorable Commissioner of Patents
Washington, D.C. 20231

APPOINTMENT OF ASSOCIATES

Sir:

The undersigned Attorney of Record hereby revokes all prior appointments (if any) of Associate Attorney(s) or Agent(s) in the above-captioned case and appoints:

AARON WAXLER   (Registration No. 48,027) and

MICHAEL MARION   (Registration No. 32,266)

c/o U.S. PHILIPS CORPORATION, Intellectual Property Department, 580 White Plains Road, Tarrytown, New York 10591, his Associate Attorney(s)/Agent(s) with all the usual powers to prosecute the above-identified application and any division or continuation thereof, to make alterations and amendments therein, and to transact all business in the Patent and Trademark Office connected therewith.

ALL CORRESPONDENCE CONCERNING THIS APPLICATION AND THE LETTERS PATENT WHEN GRANTED SHOULD BE ADDRESSED TO THE UNDERSIGNED ATTORNEY OF RECORD.

Respectfully,

Michael E. Marion, Reg. 32,266
Attorney of Record

Dated at Tarrytown, New York
on December 11, 2002.

S:\WX\Applications\US020542-prov_app.doc

3

SUB ___15___

MAY 28 2002
SD ___703366___
PS ___12 - 10___
B. McILVAINE ___R7D___
DIV ___WAX___

EXPORT CONTROL ECO INITIALS
NUMBER (ECCN)

NLR EAR99   29 MAY 2002

FOR IP&S USE ONLY
OC: GB, KV, SNM, DA.
JWW, DJO,

PHILIPS ELECTRONICS NORTH AMERICA CORPORATION

DISCLOSURE OF INVENTION

THIS DESCRIPTION SHOULD BE SUPPLEMENTED BY ATTACHING COPIES OF RELEVANT DOCUMENTS, SUCH AS

PUBLISHED ARTICLES OR PATENTS, PRODUCT BROCHURES, ENGINEERING NOTEBOOK PAGES AND DRAWINGS.

✓DESCRIPTIVE TITLE OF THE INVENTION: Dataflow-synchronized embedded field programmable processor array

INVENTOR #1: __Geoffrey F Burns__   __SMRS__   __Research/Briarcliff__
                   Name (Print)   **Job Title**   **Division / Location**

__g.burns@philips.com__   __Satyen Mukherjee__
E-Mail address   **Manager's Name**

__11 Peaceable Ridge Road, Ridgefield, CT 06877__   __USA__
Home Address   **Country of Citizenship**

INVENTOR #2: __Krishna Vaidyanathan SMRS__   __Research/Briarcliff__
                   Name (Print)   **Job Title**   **Division / Location**

__Krishna.vaidyanathan@philips.com__   __Dave Bryan__
E-Mail address   **Manager's Name**

_____India_____
Home Address   **Country of Citizenship**

INVENTOR #3: _____
                   Name (Print)   **Job Title**   **Division / Location**

_____
E-Mail address   **Manager's Name**

_____
Home Address   **Country of Citizenship**

JUN 0 3 2002

1. PRIMARY CONTACT
   Who should IP&S contact for further technical information about the invention and information about its planned use or public disclosure?

   Inventor Name: Geoffrey Burns

2. PRESENT STAGE OF THE INVENTION

   ☐ Idea   ☒ Research   ☐ Development   ☐ Manufacture

3. GOVERNMENT CONTRACT INVENTION

   Was the invention made under a government contract?   ☐ Yes   ☒ No

4. **PLEASE PROVIDE A TWO OR THREE SENTENCE SUMMARY OF YOUR INVENTION and include and underline KEY WORDS which might be useful in searching for relevant patents or publications:**

   A field programmable processor array is described which can be embedded in a system on a chip. Similar to a field programmable gate array macro, the fppa can be included in a system on chip to accommodate new circuit designs post silicon, but with improved density and performance relative to currently available embedded field programmable gate arrays.

5. PRESENT STATE OF THE ART

   Briefly describe the closest already-known technology that relates to the invention. This would include, for example, already existing products, methods or compositions which are known to you personally or through descriptions in publications.

   Embedded field programmable gate arrays are available from a limited number of vendors, and offer post silicon reconfigurability in systems on a chip. These macros still offer poor design density and unpredictable clock speed, particularly for high speed demodulation functions in digital radios.

   (ADD LINES AS NECESSARY, IF COMPLETING ON COMPUTER, OR ATTACH ADDITIONAL PAGES)

6. ADVANCEMENT IN STATE OF THE ART
   Briefly describe the unique advancement achieved by the invention. This may be done, for example, by describing a problem with the prior art that is solved or specific objects that are achieved by the invention.
   The field programmable gate array is replaced with a programmable systolic array, which can more efficiently accommodate the signal processing in a digital radio. The systolic array is bounded by border cells which provide dataflow synchronization to the system, allowing simple integration. A simple software programming flow is possible using this system, as opposed to the proprietary hardware design flow characteristic of FPGA's.

   (ADD LINES AS NECESSARY, IF COMPLETING ON COMPUTER, OR ATTACH ADDITIONAL PAGES)

7. WHAT IS THE BEST WAY YOU KNOW OF TO IMPLEMENT THE INVENTION?
   Briefly describe the invention and how it achieves the advancement described in paragraph 7.

(ADD LINES AS NECESSARY, IF COMPLETING ON COMPUTER, OR ATTACH ADDITIONAL PAGES)

*******__PLEASE NOTE__: IF WE DECIDE TO FILE AN APPLICATION ON THIS INVENTION, THE ATTORNEY WRITING THE APPLICATION WILL NEED THIS INFORMATION FROM YOU IN AS MUCH __DETAIL__ AS POSSIBLE IN ORDER TO COMPLETE THE APPLICATION.**

8. __DISCLOSURE OUTSIDE OF PHILIPS__
If the invention has been or will be disclosed publicly or to anyone other than a Philips' employee, describe to whom (person / company), date and where.
Adelante Technologies(potentially)
Ibiquity Digital radio (potentially)

9. __PUBLICATION__
Has a description of the invention been published or submitted for publication? ☐ Yes ☒ No
If "yes", please list each occurrence:

Date	Publication/Submission

10. __PLEASE INDICATE THE PRODUCT OR SERVICE IN WHICH YOUR INVENTION MOST LIKELY WILL BE USED:__
IC's for broadcast channel decoding, wireless LAN physical layer, and cellular

INVENTOR #1: _____ 5/24/02
                    Signature   Date

INVENTOR #2: _____ 5/24/02
                    Signature   Date

INVENTOR #3: _____
                    Signature   Date

1 Introduction

In [1] a programmable systolic array structure was proposed to provide an efficient, high-performance, and flexible architecture for signal processing functions in the front end of a programmable digital transceiver. The array can support programs implementing programmable digital filters, as well as other important signal processing kernels. Figure 1 illustrates the essential elements of the architecture.
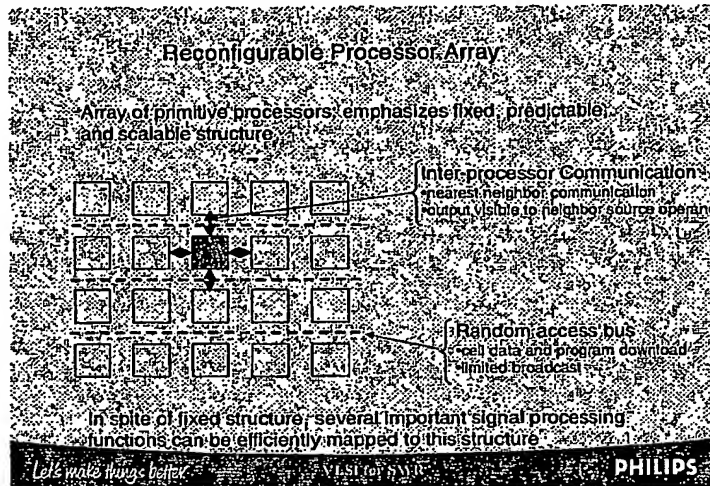

Figure 1: Reconfigurable Processor Array architecture. A programmable systolic array for programmable digital radio front ends.

The array is currently programmed using assembly language entry, with the assistance of a programming graphical user interface tool. The tool generates an image of the array program, mapped to each cell. The program image would reside in an on chip memory, then would be downloaded to the array over a shared bus, in a random access fashion [1]. It is straightforward to extend this methodology to include design entry from a signal flow graph editor and simulation system such as the commercial offerings Simulink, SPW, Cossap. This methodology is illustrated in Figure 2.
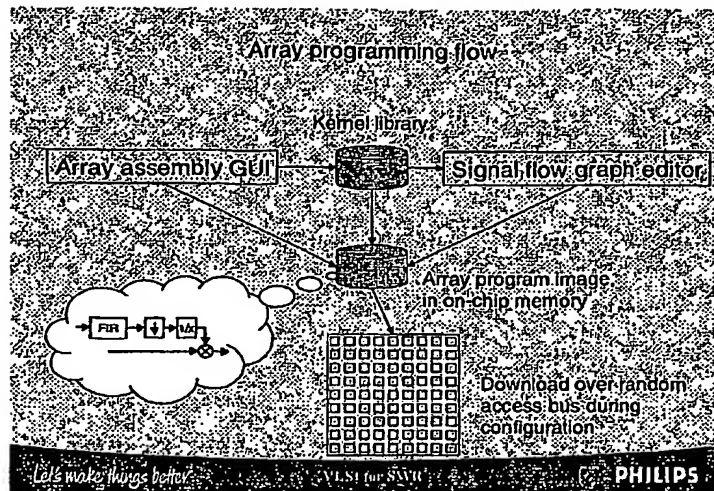
Figure 2: array programming flow

2 Modularization of processor array within embedded FPGA footprint

In scenarios where we would like to insert programmable signal chain into an existing chain to support unanticipated changes, an embedded FPGA is often touted to provide the solution. However, the poor macro density and clock speed still renders this scheme expensive. An alternative would be to embed the processor array in a similar embedded FPGA footprint. As illustrated in Figure 3, a simple routing scheme can be designed to allow insertion or replacement of functions in a signal chain with those realized on the processor array.
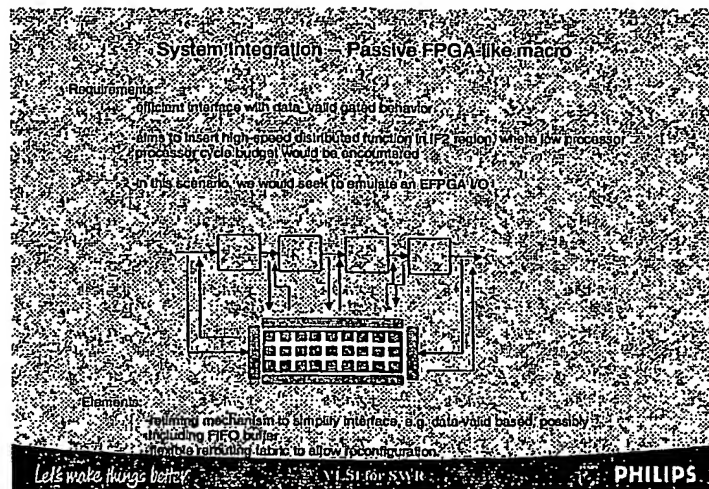
Figure 3: Scenario for array integration within embedded FPGA footprint, and its use as a programmable logic macro in a signal chain.

In order to allow the embedded macro to be connected to the system in a flexible way, the underlying array is terminated by border control cells that exchange data with the array according to its nearest neighbor interconnection scheme. The border control cells are connected to external I/O circuits in a reconfigurable manner. This reconfigurable interconnection can be realized using a crossbar network, or else via a local selection mechanism in each border cell. The external I/O circuits then provide the connection points to the external circuitry.
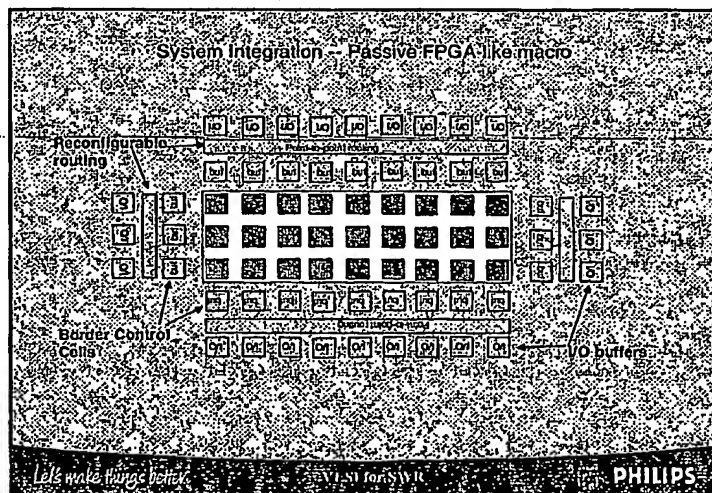
Figure 4: Illustrates some of the features of the interface structure that would provide an embedded macro footprint. The interface scheme entails one I/O pad per unterminated

array cell, one border control cell per unterminated array cell, and a configurable multiplexing or crossbar scheme to interconnect the I/O pads with the border cells.

The synchronization scheme between the external system and internal array is an important issue. External synchronization is often dataflow driven, which means functions are initiated upon the arrival of one or more valid data samples, often signaled using data valid signals. The internal synchronization scheme is systolic, meaning each processor runs in lock step. It would preferable for the embedded macro to conform to a dataflow synchronization mechanism. A more general scheme can be the ring buffer scheme often used in signal processing simulation systems such as Ptolemy, SPW, Simulink, or COSSAP. In this scheme, each active input is parameterized to indicate the quantity of valid samples that must be accumulated before the function is triggered. The output is similarly parameterized, except the parameter indicates the quantity of samples that are generated per function call. This synchronization scheme is outlined in Figure 5 below.
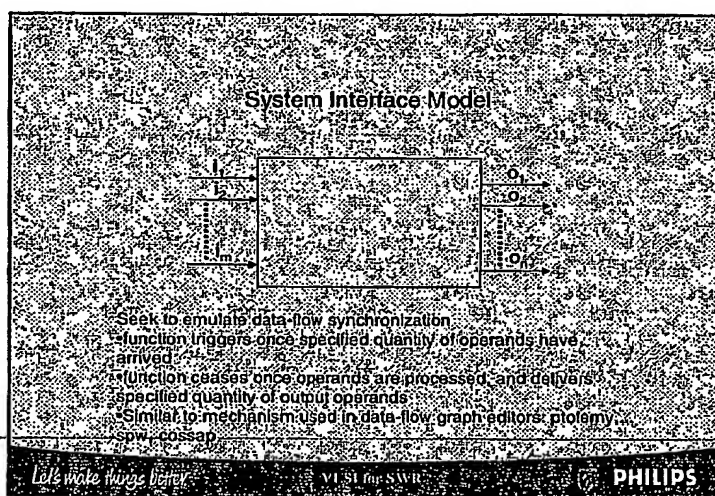

Figure 5: Characteristics of dataflow synchronization model, to be provided by the array boundary.

To realize the dataflow synchronization scheme, a border cell design is proposed that derives from the internal array cell. For exchange of data with the internal array, the border cell must maintain the manual synchronization method used between cells in the array. To simultaneously support ring buffer synchronization, the border cell must also accumulate and count incoming valid samples, and signal when the required quantity has arrived. Furthermore, the border cell must externally transmit all accumulated samples during array program execution. Using the internal array cell as a starting point, the desired behavior can be achieved by modifying the processor internal register file, such

that data can be exchanged with the environment. According to Figure 6 below, an I/O register buffer is appended to the processor design to achieve this behavior. For exchange of data with the array, the border cell can be programmed in the same manner, and with the same array tools, as used in the internal array. For exchange of data with the external environment, a configurable state machine within the I/O register buffer is employed.
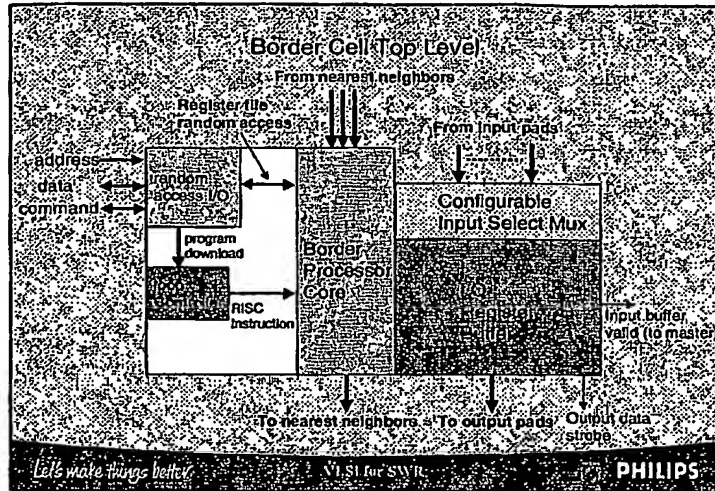

Figure 6: Border cell, which synchronizes the array interface with the external system using a dataflow mechanism. The cell is a modification of the internal cell, in order to maintain a uniform programming model with the programmable array.

Figure 8 illustrates the concepts underlying the I/O register buffer, and Figure 8 illustrates the buffer's interaction with the processor. A register space is divided into two partitions. One partition is for registers mapped to the ring buffer input, while the other maps to the ring buffer output. Furthermore, each register file partition is swapped between control of the I/O register buffer state machine, and availability to the internal processor control. Under processor control, the register file is available to exchange data with the array using the normal nearest neighbor communication mechanism. Otherwise the register subspace is accumulating input samples, or discharging output samples under control of the write and read controls. The read control, in particular, must count the incoming samples, store them in the proper registers, signal when the programmed quantity of inputs have arrived, then swap the register mappings between processor and I/O control. The output control must empty the output registers and toggle the data valid signal for the external process.
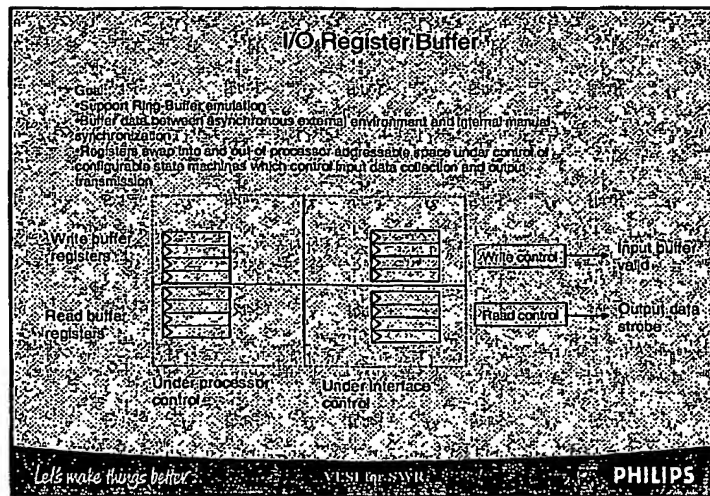
Figure 7: Detail of I/O register buffer, which provides the synchronization between the internal manually-syncrhonized array and the external dataflow synchronization environment.
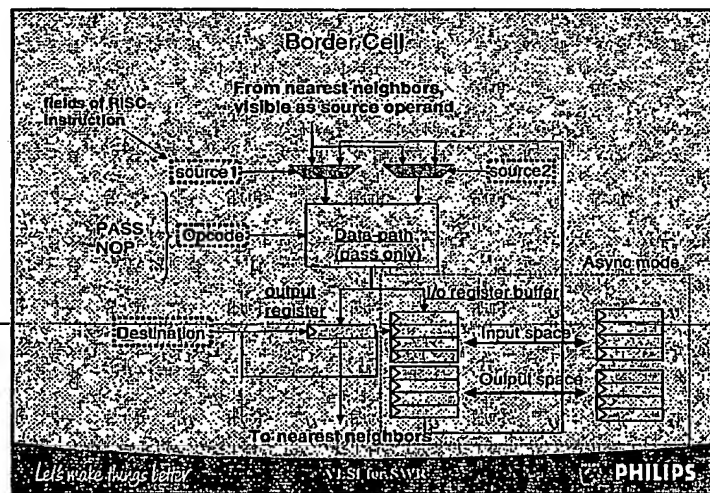

Figure 8: Detail of border processor core, which supports the dataflow synchronization using the internal cell programming model.

Another essential element to control the array is a master control cell, which is illustrated in Figure 9. The master cell drives the control bus connected to each cell in the array. This cell then has two roles. During configuration, the cell must pass the array program data from the system controller to the array program bus. During operation, the master

cell triggers the array functionality by transmitting an execute command over the control bus once all active input border cells signal a valid buffer.
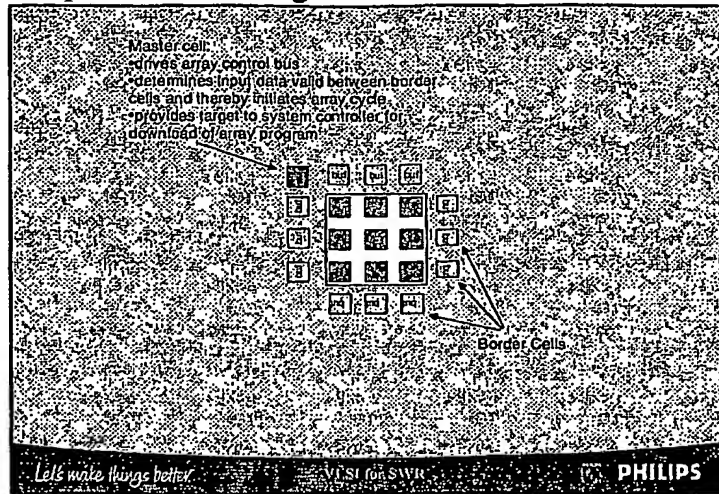
Figure 9: Master cell, which drives the array control bus according to incoming configuration information (during configuration), and ring buffer valid signals (during steady state).

3 References

1. G Burns et al., Programmable array for efficient computation of convolutions in digital signal processing, Philips disclosure 702046, March 9, 2001.
2. G Burns et al., Modular Integration of a Systolic Array Processor within a system on chip, disclosure, May 23, 2002.